

PW213/White

PC211/Cream

PG209/Grey

Premium fabric serie is produced from black-out PVC and has 5 years warranty. Cover is water & light proof and flame retardant. The color tone and pattern level shown in this color swatch should be used only as a guide.



UV Resistant



No Pockets or Bubbles




Flame Retardant



5 Years Guarantee




Thermal Comfort



Dimensional Stability



Tear Resistance

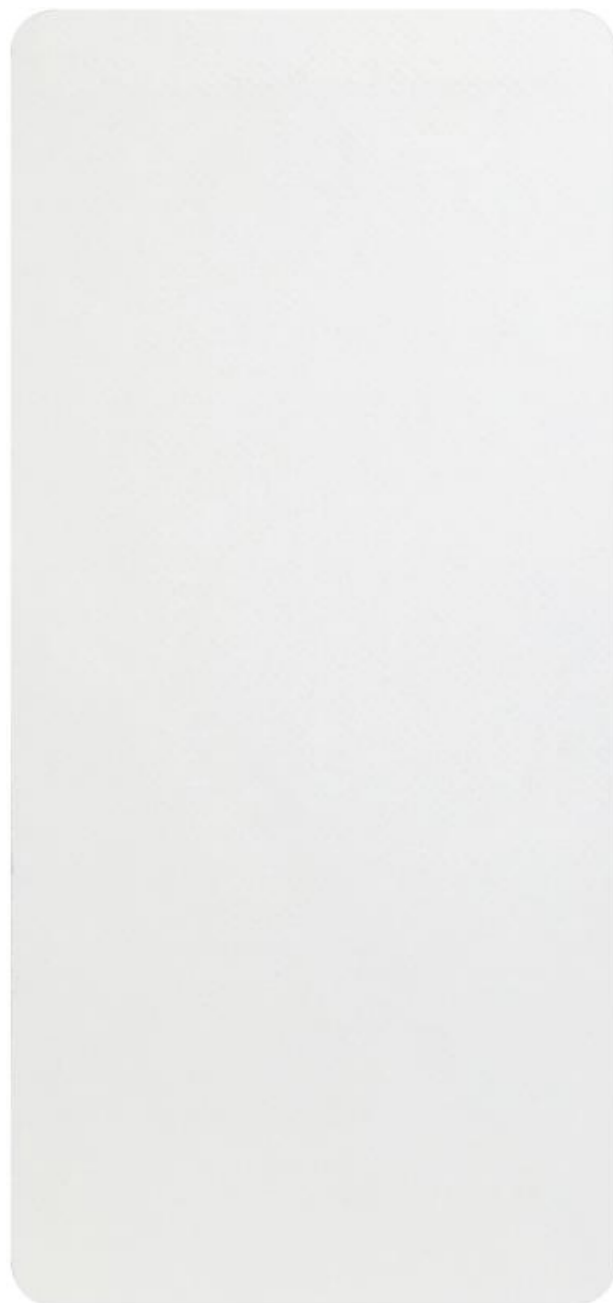

WT785/White



CR295/Cream

Basic fabric serie is produced from black-out PVC and has 5 years warranty. Cover is water & light proof and flame retardant. The color tone and pattern level shown in this color swatch should be used only as a guide.



UV Resistant



No Pockets or Bubbles




Flame Retardant



5 Years Guarantee





Thermal Comfort



Dimensional Stability



Tear Resistance

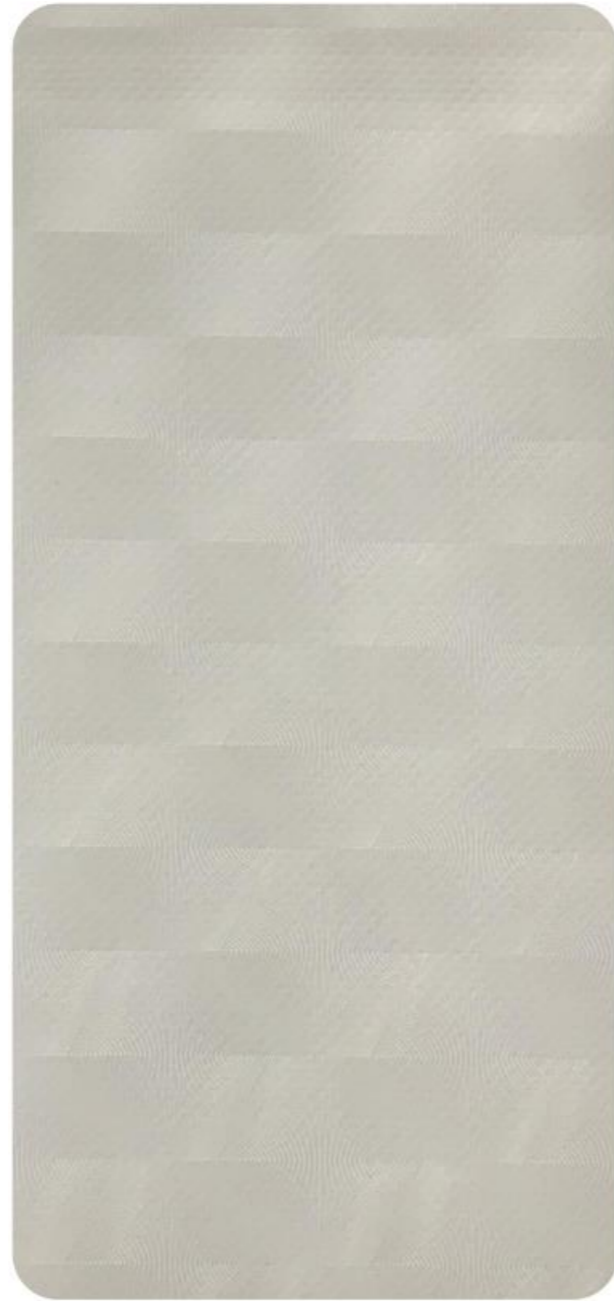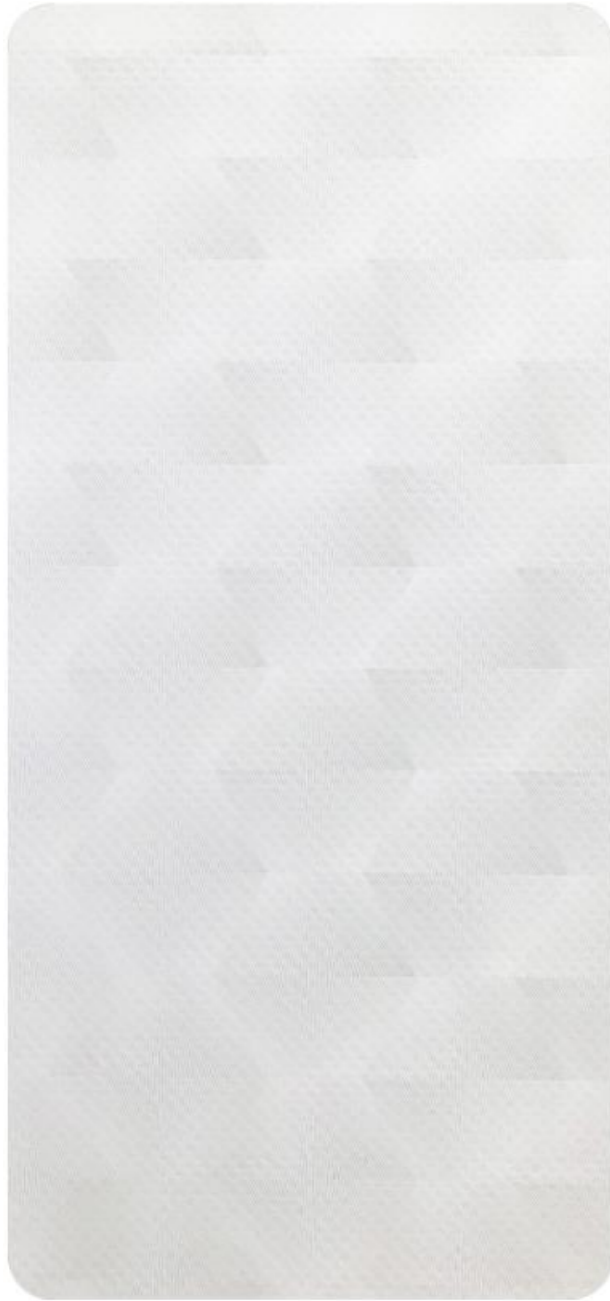

WTEX/White

CRMX/Cream

GRYX/Grey

BRDX/Bordeaux

Xclusive fabric serie is produced from black-out PVC and has 5 years warranty. Cover is water & light proof and flame retardant. The color tone and pattern level shown in this color swatch should be used only as a guide.



UV Resistant



No Pockets
or Bubbles




Flame
Retardant



5
years
guarantee




Thermal
Comfort



Dimensional
Stability



Tear
Resistance

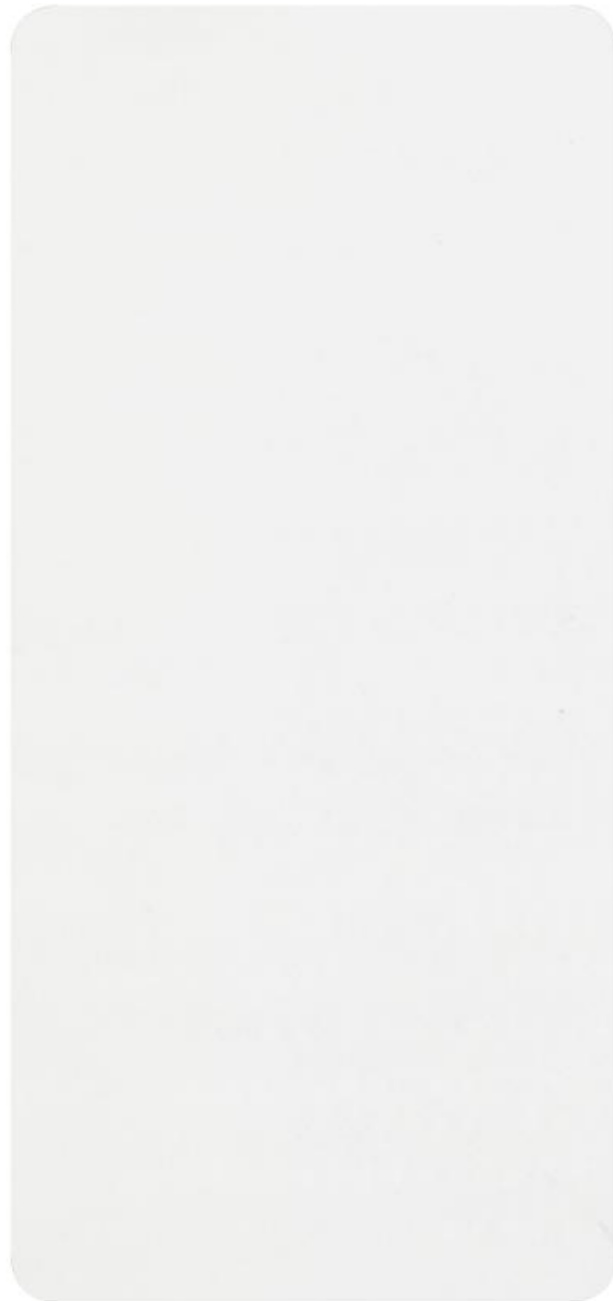

MW23/White



MC26/Cappuccino

Matt fabric serie is produced from black-out PVC and has 5 years warranty. Cover is water & light proof and flame retardant. The color tone and pattern level shown in this color swatch should be used only as a guide.



UV Resistant



No Pockets or Bubbles




Flame Retardant



5 Years Guarantee





Thermal Comfort



Dimensional Stability



Tear Resistance

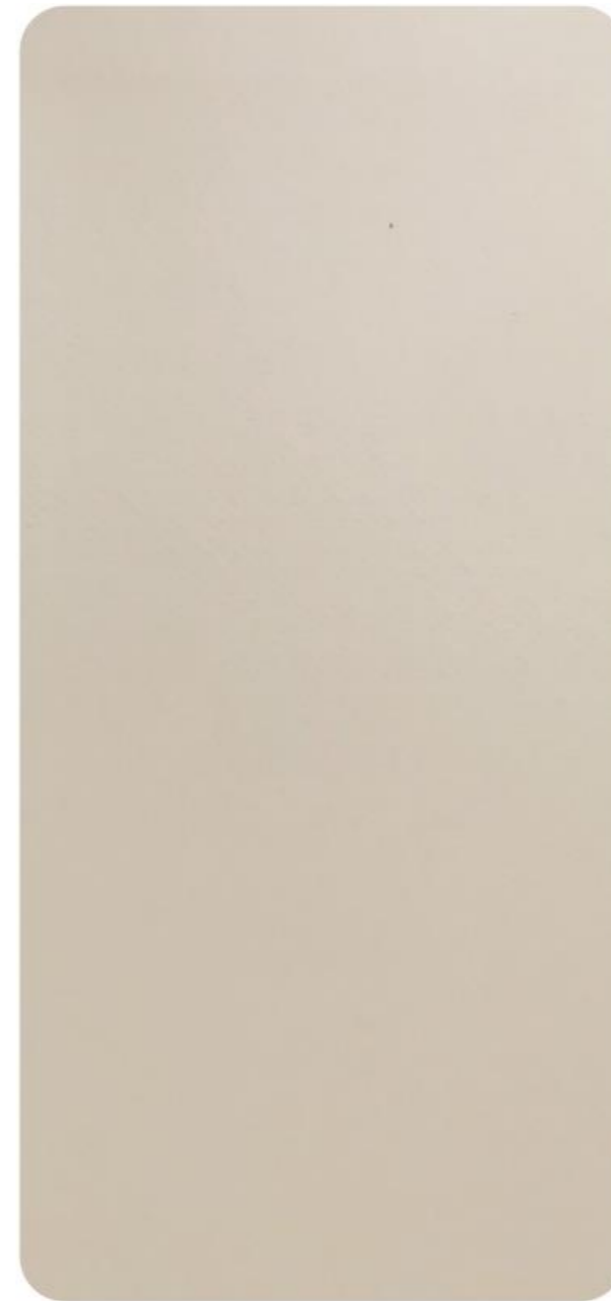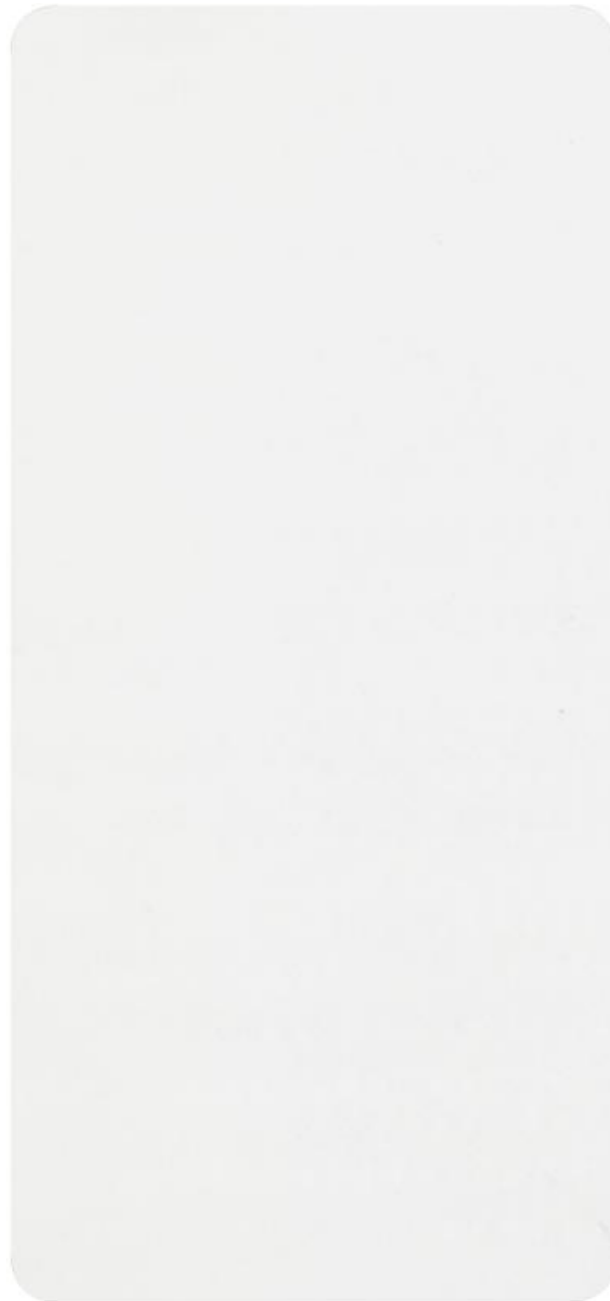

LW22/White

LCR33/Cream

LC44/Cappuccino

LG66/Grey

Matt / Linear fabric led serie is produced from black-out PVC and has 5 years warranty. Cover is water & light proof and flame retardant. The color tone and pattern level shown in this color swatch should be used only as a guide.

Available only with 'Linear Fabric Dimmer Led' option.



UV Resistant



No Pockets or Bubbles




Flame Retardant



5 Years Guarantee



Thermal Comfort



Dimensional Stability



Tear Resistance



STRW22/White



STRB33/Black

Semi-transparent fabric serie is produced from PVC and has 2 years warranty. Cover is waterproof and flame retardant. The color tone and pattern level shown in this color swatch should be used only as a guide.



UV Resistant



No Pockets or Bubbles




Flame Retardant



2 Years Guarantee



Thermal Comfort



Dimensional Stability



Tear Resistance

specifications

premium

Technical Specifications / Technische Eigenschaften	Unit / Einheit	Numbers / Werte
Weight / Gewicht	g/m ²	730
Thickness / Dicke	mm	0,55
Warp/Weft Tensile Strenght / Kett-/Schussdehnfestigkeit	N/50 mm	2500/2500
Warp/Weft Tearing Strenght / Kett-/Schussreißfestigkeit	N/50 mm	200/200
Flame Retardant / Brandschutz		B 1/DIN 4102-1
Cold Resistance / Kältebeständigkeit	°C	-30
Heat Resistance / Wärmebeständigkeit	°C	+70

basic

Technical Specifications / Technische Eigenschaften	Unit / Einheit	Numbers / Werte
Weight / Gewicht	g/m ²	800
Thickness / Dicke	mm	0,7
Warp/Weft Tensile Strenght / Kett-/Schussdehnfestigkeit	N/50 mm	3500/3500
Warp/Weft Tearing Strenght / Kett-/Schussreißfestigkeit	N/50 mm	350/350
Flame Retardant / Brandschutz		B 1/DIN 4102
Cold Resistance / Kältebeständigkeit	°C	-40
Heat Resistance / Wärmebeständigkeit	°C	+70

matt / linear fabric dimmer led

Technical Specifications / Technische Eigenschaften	Unit / Einheit	Numbers / Werte
Weight / Gewicht	g/m ²	1150
Thickness / Dicke	mm	1,05
Warp/Weft Tensile Strenght / Kett-/Schussdehnfestigkeit	N/50 mm	7000/6500
Warp/Weft Tearing Strenght / Kett-/Schussreißfestigkeit	N/50 mm	1000/1000
Flame Retardant / Brandschutz		B 1/DIN 4102
Cold Resistance / Kältebeständigkeit	°C	-30
Heat Resistance / Wärmebeständigkeit	°C	+70

semi-transparent

Technical Specifications / Technische Eigenschaften	Unit / Einheit	Numbers / Werte
Weight / Gewicht	g/m ²	670
Thickness / Dicke	mm	0,55
Warp/Weft Tensile Strenght / Kett-/Schussdehnfestigkeit	N/50 mm	3200/3200
Warp/Weft Tearing Strenght / Kett-/Schussreißfestigkeit	N/50 mm	450/400
Flame Retardant / Brandschutz		B 1/DIN 4102
Cold Resistance / Kältebeständigkeit	°C	-25
Heat Resistance / Wärmebeständigkeit	°C	+70

xclusive

Technical Specifications / Technische Eigenschaften	Unit / Einheit	Numbers / Werte
Weight / Gewicht	g/m ²	850
Thickness / Dicke	mm	0,7
Warp/Weft Tensile Strenght / Kett-/Schussdehnfestigkeit	N/50 mm	3000/3000
Warp/Weft Tearing Strenght / Kett-/Schussreißfestigkeit	N/50 mm	300/300
Flame Retardant / Brandschutz		B 1/DIN 4102
Cold Resistance / Kältebeständigkeit	°C	-40
Heat Resistance / Wärmebeständigkeit	°C	+70

matt

Technical Specifications / Technische Eigenschaften	Unit / Einheit	Numbers / Werte
Weight / Gewicht	g/m ²	800
Thickness / Dicke	mm	0,7
Warp/Weft Tensile Strenght / Kett-/Schussdehnfestigkeit	N/50 mm	3000/3000
Warp/Weft Tearing Strenght / Kett-/Schussreißfestigkeit	N/50 mm	300/300
Flame Retardant / Brandschutz		B 1/DIN 4102
Cold Resistance / Kältebeständigkeit	°C	-40
Heat Resistance / Wärmebeständigkeit	°C	+70


aluminum



RAL 9016



RAL 1013

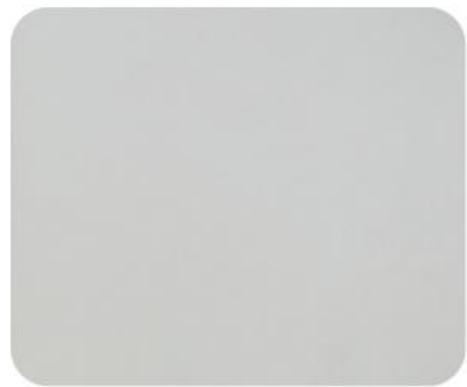


RAL 9006



RAL 7006




RAL 7016

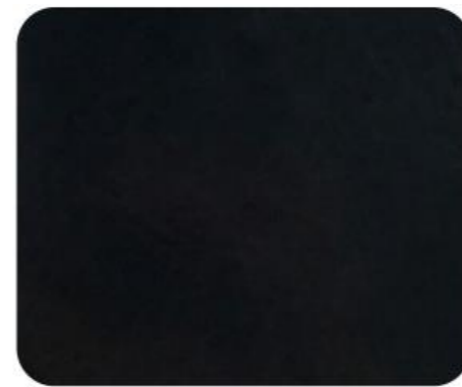

RAL 9005

The color and gloss level shown in this color swatch should be used only as a guide.

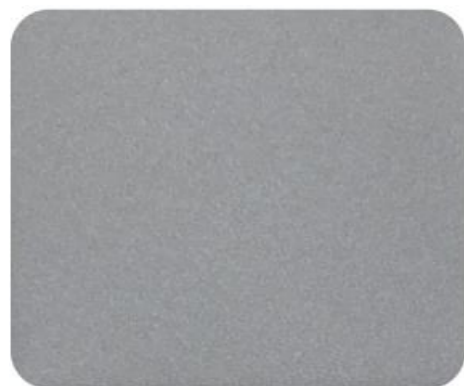

OGN35



OGN39



OS561



ON617



OY395



ON611

The color and gloss level shown in this color swatch should be used only as a guide.



ST9010



ST9001



ST1013



ST7039



ST7016



ST8019

The color and gloss level shown in this color swatch should be used only as a guide.